



Specifications for SRM Model 1216:


Overall Length (A)..... 33 ¾" (with butt pad)
Overall Height (B)..... 7 ½" (w/o sights)
Length of Pull (C).....13 ¼" (with butt pad)
Front Rail (D) ¼" (Δ receiver rail)
Barrel Length..... 18 ½" (w/ Breacher 21")
Muzzle Thread Pitch.....7/8 - 24
Choke.....Fixed cylinder bore
Weight.....7 ¾ Lbs (w/ magazine, empty)
Weight (Loaded)..... 9 ¼ Lbs (approx, w/16 rds)
Magazine Weight.....1.0 lb (empty)
Breach Weight.....5.6 oz
Chamber.....12ga, 2 ¾" or 3", fluted
Capacity.....16+1
Operating Principle..... Semi-automatic,
roller-delayed blowback
Trigger Pull..... 6 ¼ lbs (average)
Colors..... Black, Flat Dark Earth
Magazine Release.....Center front, ambidextrous
Magazine Index Levers ... Right & left side, ambidextrous

Key Features:

16-round detachable rotating magazine
Machined 6160 billet aluminum receiver
Lightweight polymer construction
Extended 1913 Picatinny tri-rail (polymer)
Hammer forged, threaded barrel
Knurled thread protector (included)
Fluted chamber for positive extraction
Compact design
Kick-Eez® Sorbothane® butt pad
Push-pin break open design
Made in the USA
Lifetime Guarantee

Configurable for Right- or Left-Hand Operation:

Bolt lock/release
Charging handle
Safety lever
Ejection
Front Sling Loop
Rear QD Swivel Mount

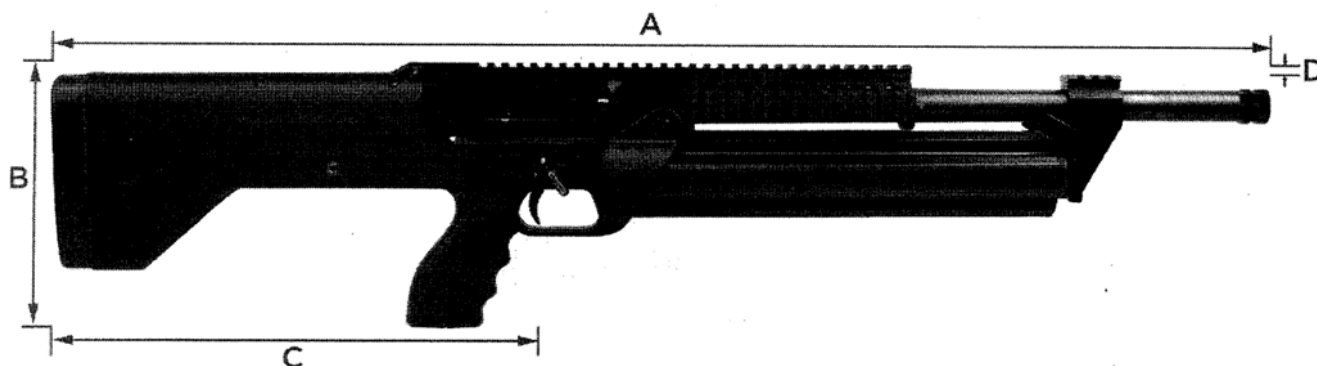

SRM 1216 Semi-Auto Shotgun, Black.....	SRM1216STB
SRM 1216 Semi-Auto Shotgun, FDE.....	SRM1216STS
Spare 16 Rd Magazine, Black.....	SRM1216MSB
Spare 16 Rd Magazine, FDE.....	SRM1216MSS
Kick Eez® Sorbothane® Recoil Pad.....	SRM1216BPS
Door Breacher/Flash Hider - 4 Point.....	SRM1216DBF
Thread Protector, 7/8-24.....	SRM1216TP